


# CITY OF SAN RAMON

## DRystack/ROCKWALL RETAINING WALL

### (Excavation/Drainage Without Engineering)

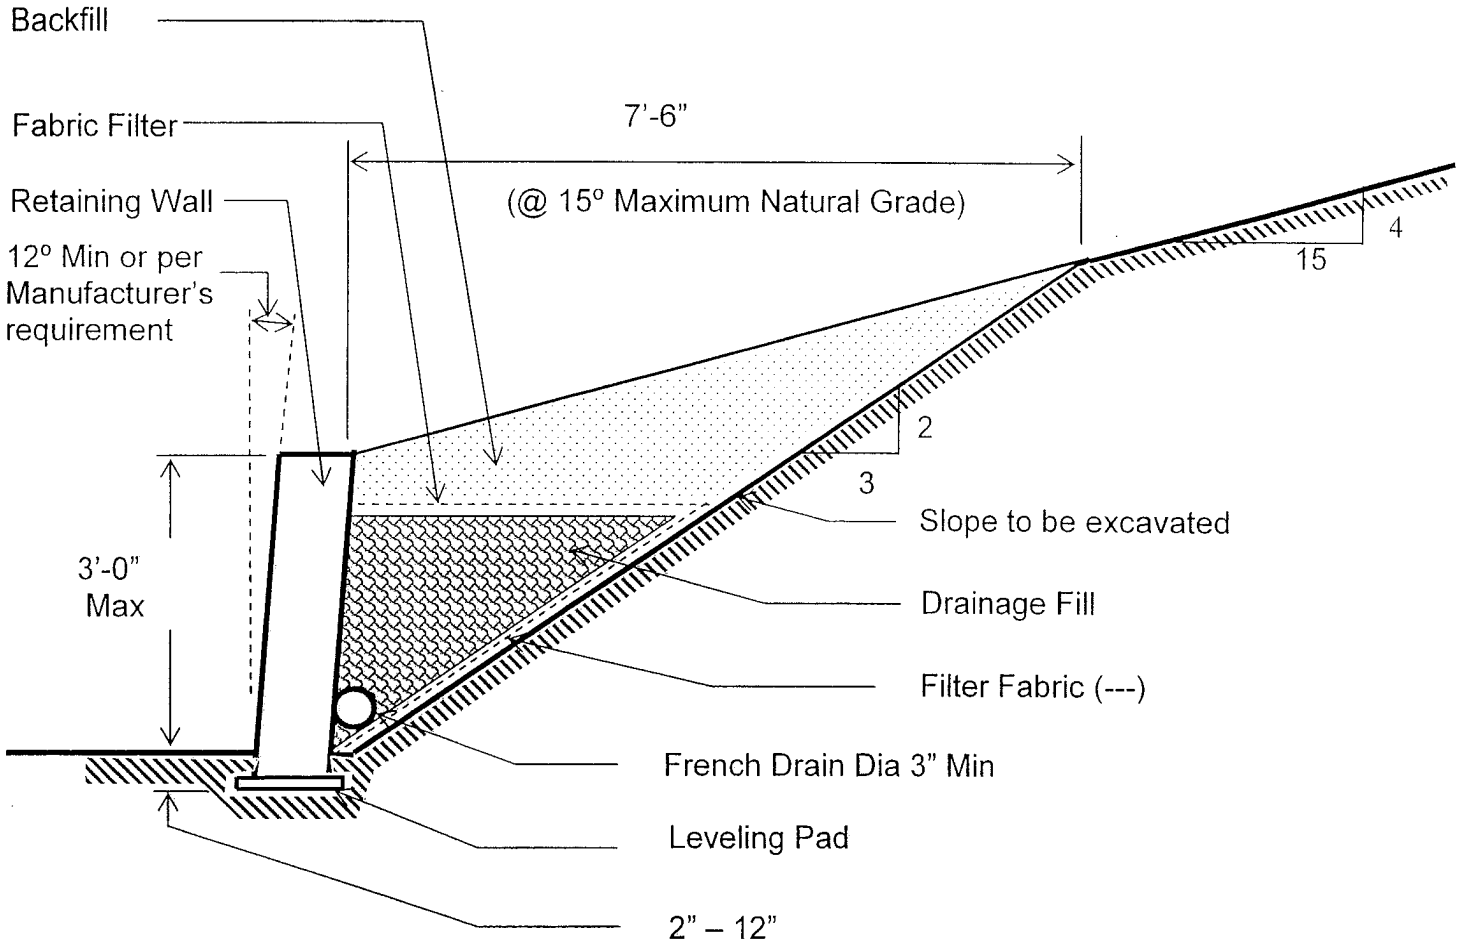

1. Maximum natural grade slope – 4 vertical to 15 horizontal (15°)
2. Maximum excavated slope – 2 vertical to 3 horizontal (33°).
3. Maximum excavated volume – 50 Cubic yards. **Any excavation or fill in excess of this volume requires an encroachment permit from Engineering Services Department.**
4. Drystack/Rockwall may include gravity stack, Allan Block, Keystone and other similar wall types.
5. Assembly per manufacturer's instructions.